


ITEM	QTY	P/N	DESCRIPTION
	-042		
	X	D5359-042	STRUT ASSEMBLY, RH
1	2	D2690-6	LANYARD ASSEMBLY
2	1	D5359-2	STRUT, RH
3	1	MS17984-C406	PIN, QUICK RELEASE
4	1	MS17984-C407	PIN, QUICK RELEASE
5	2	MS27039-1-07	SCREW, PAN-HEAD
6	4	NAS1149D0363J	WASHER
7	2	90296A202	HELI-COIL, SCREW LOCK

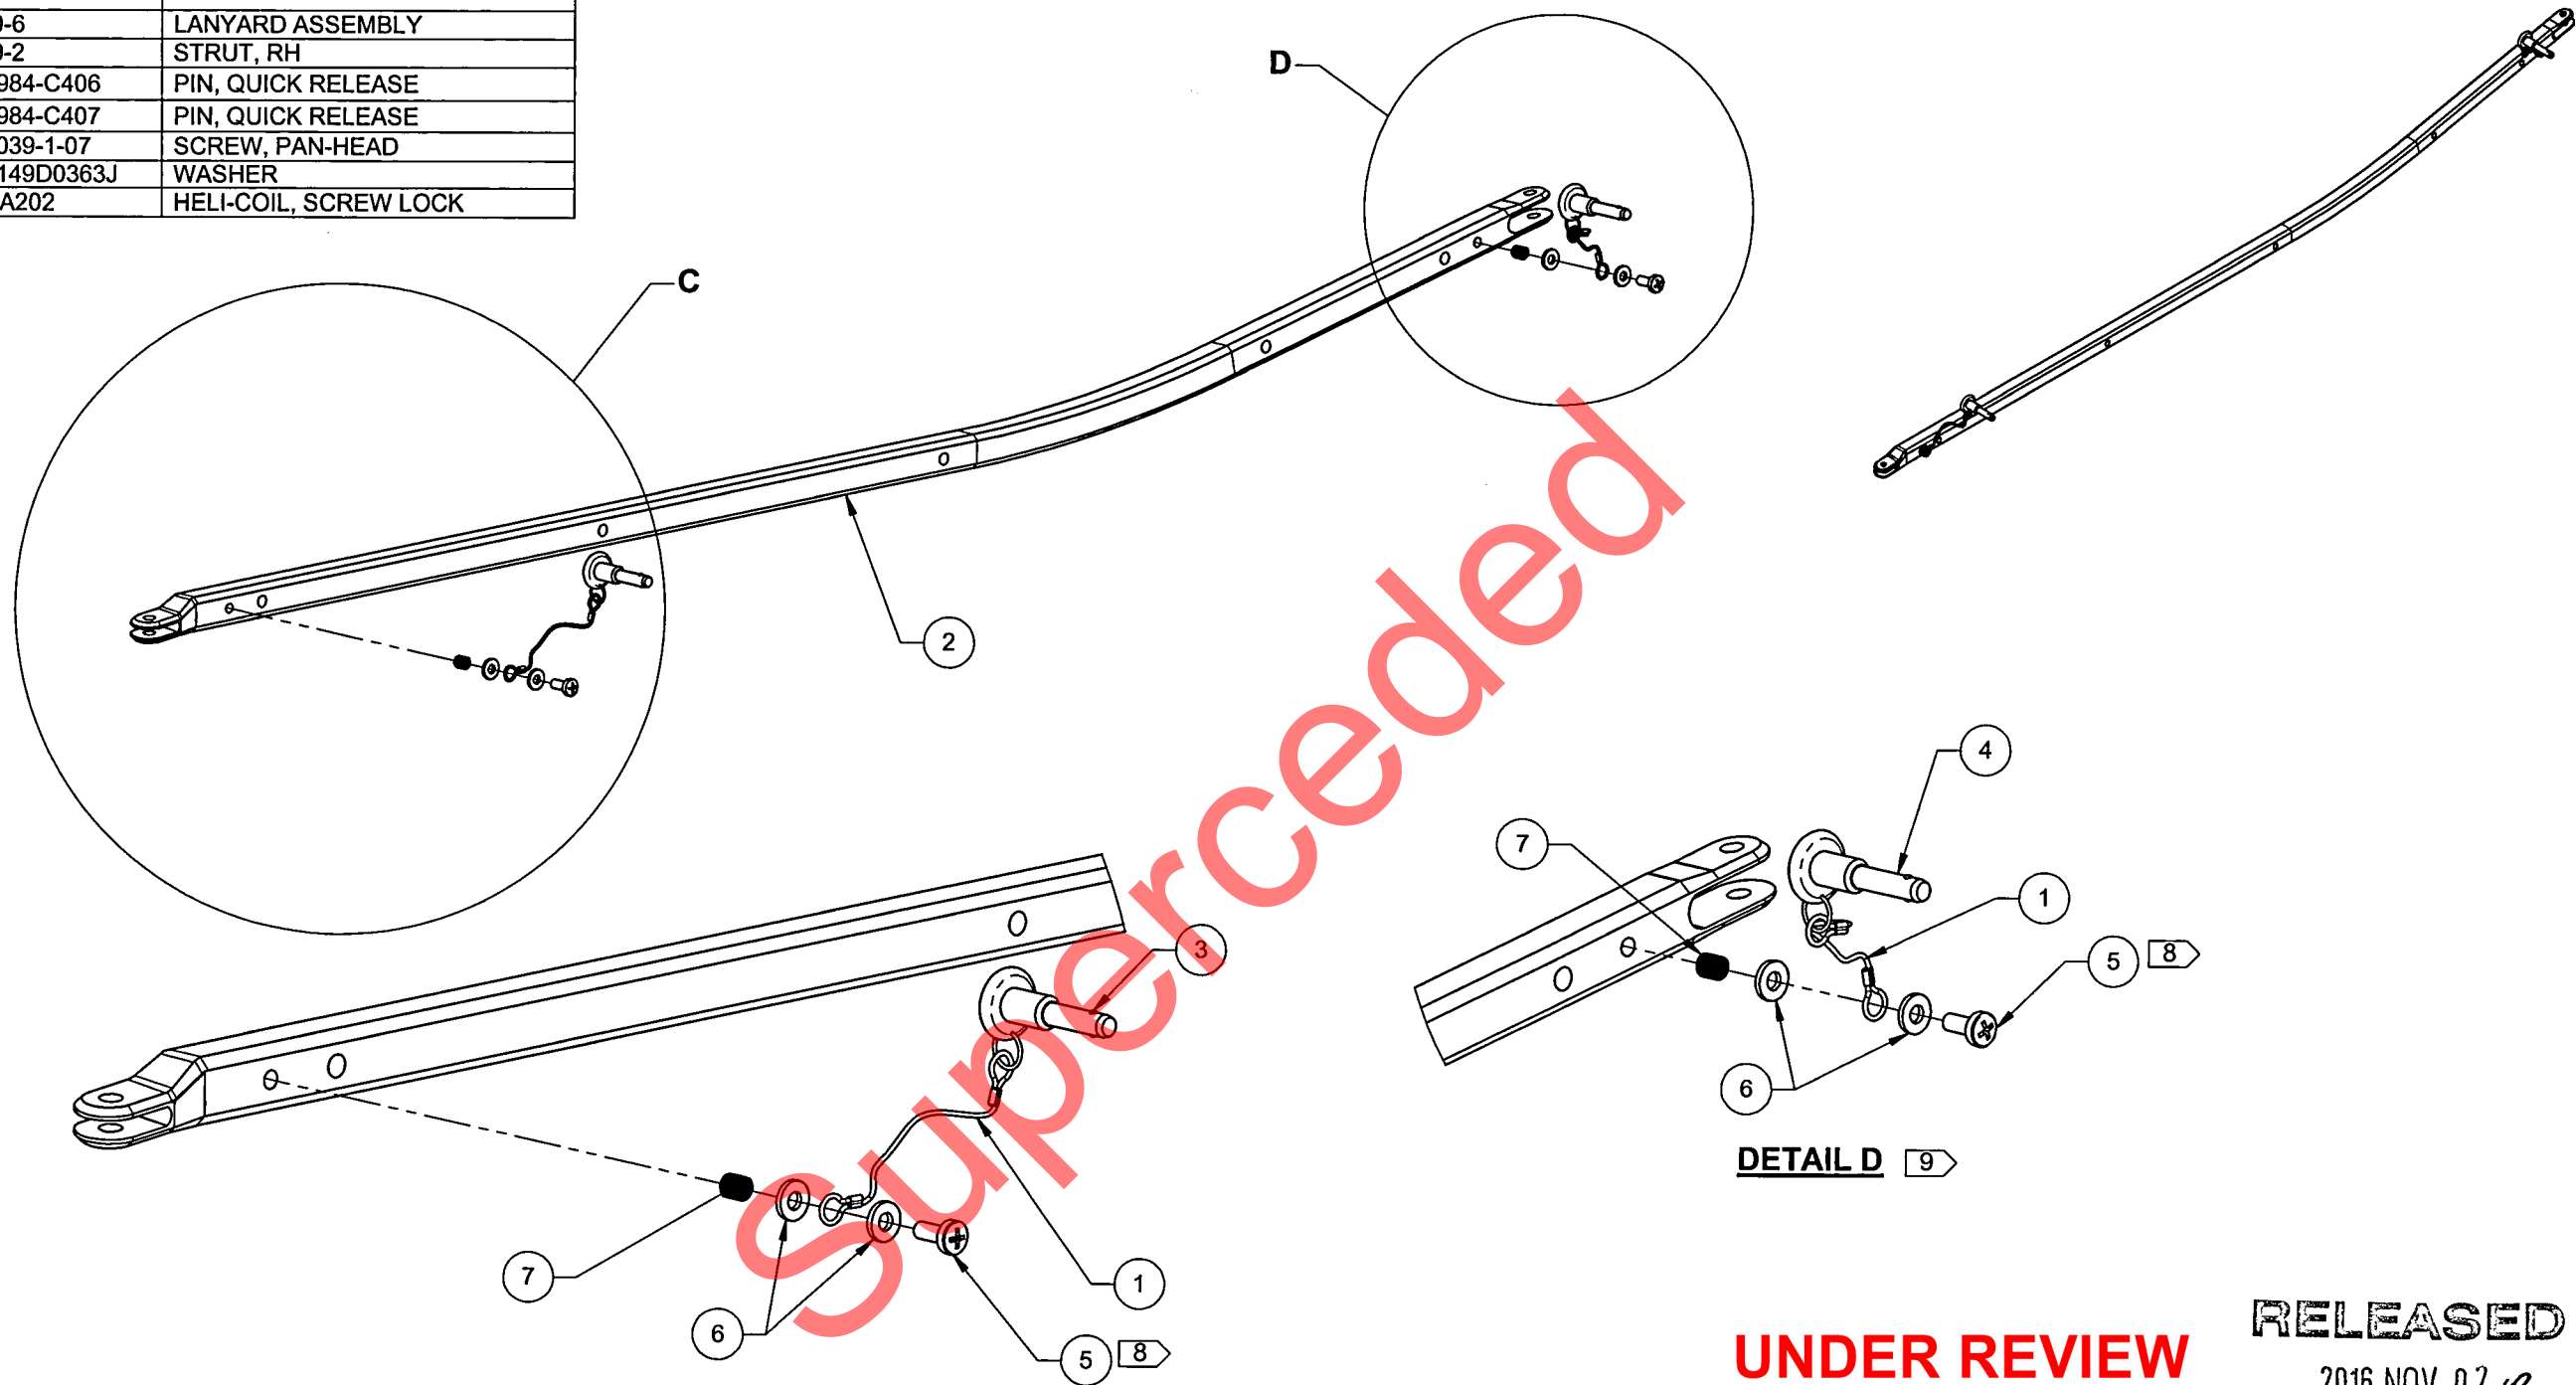

DETAIL C 9

DETAIL D 9

D5359-042 STRUT ASSEMBLY, RH

- NOTES:
- 1) MATERIAL: N/A
 - 2) FINISH: NONE
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
 - 7) WEIGHT: 2.21 lbs
 - 8) TORQUE TO 20-25 IN-LB
 - 9) ITEM 1 AND ITEMS 3-7 MAY BE INSTALLED ON EITHER SIDE

UNDER REVIEW


URF16-689 AJS 16-12-12

RELEASED

2016 NOV 02 up

APPROVED

DESIGN	VS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	VS		
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	RQ	D5359	SHEET 2 OF 4
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	STRUT ASSEMBLY	NTS
DATE	15.11.23	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

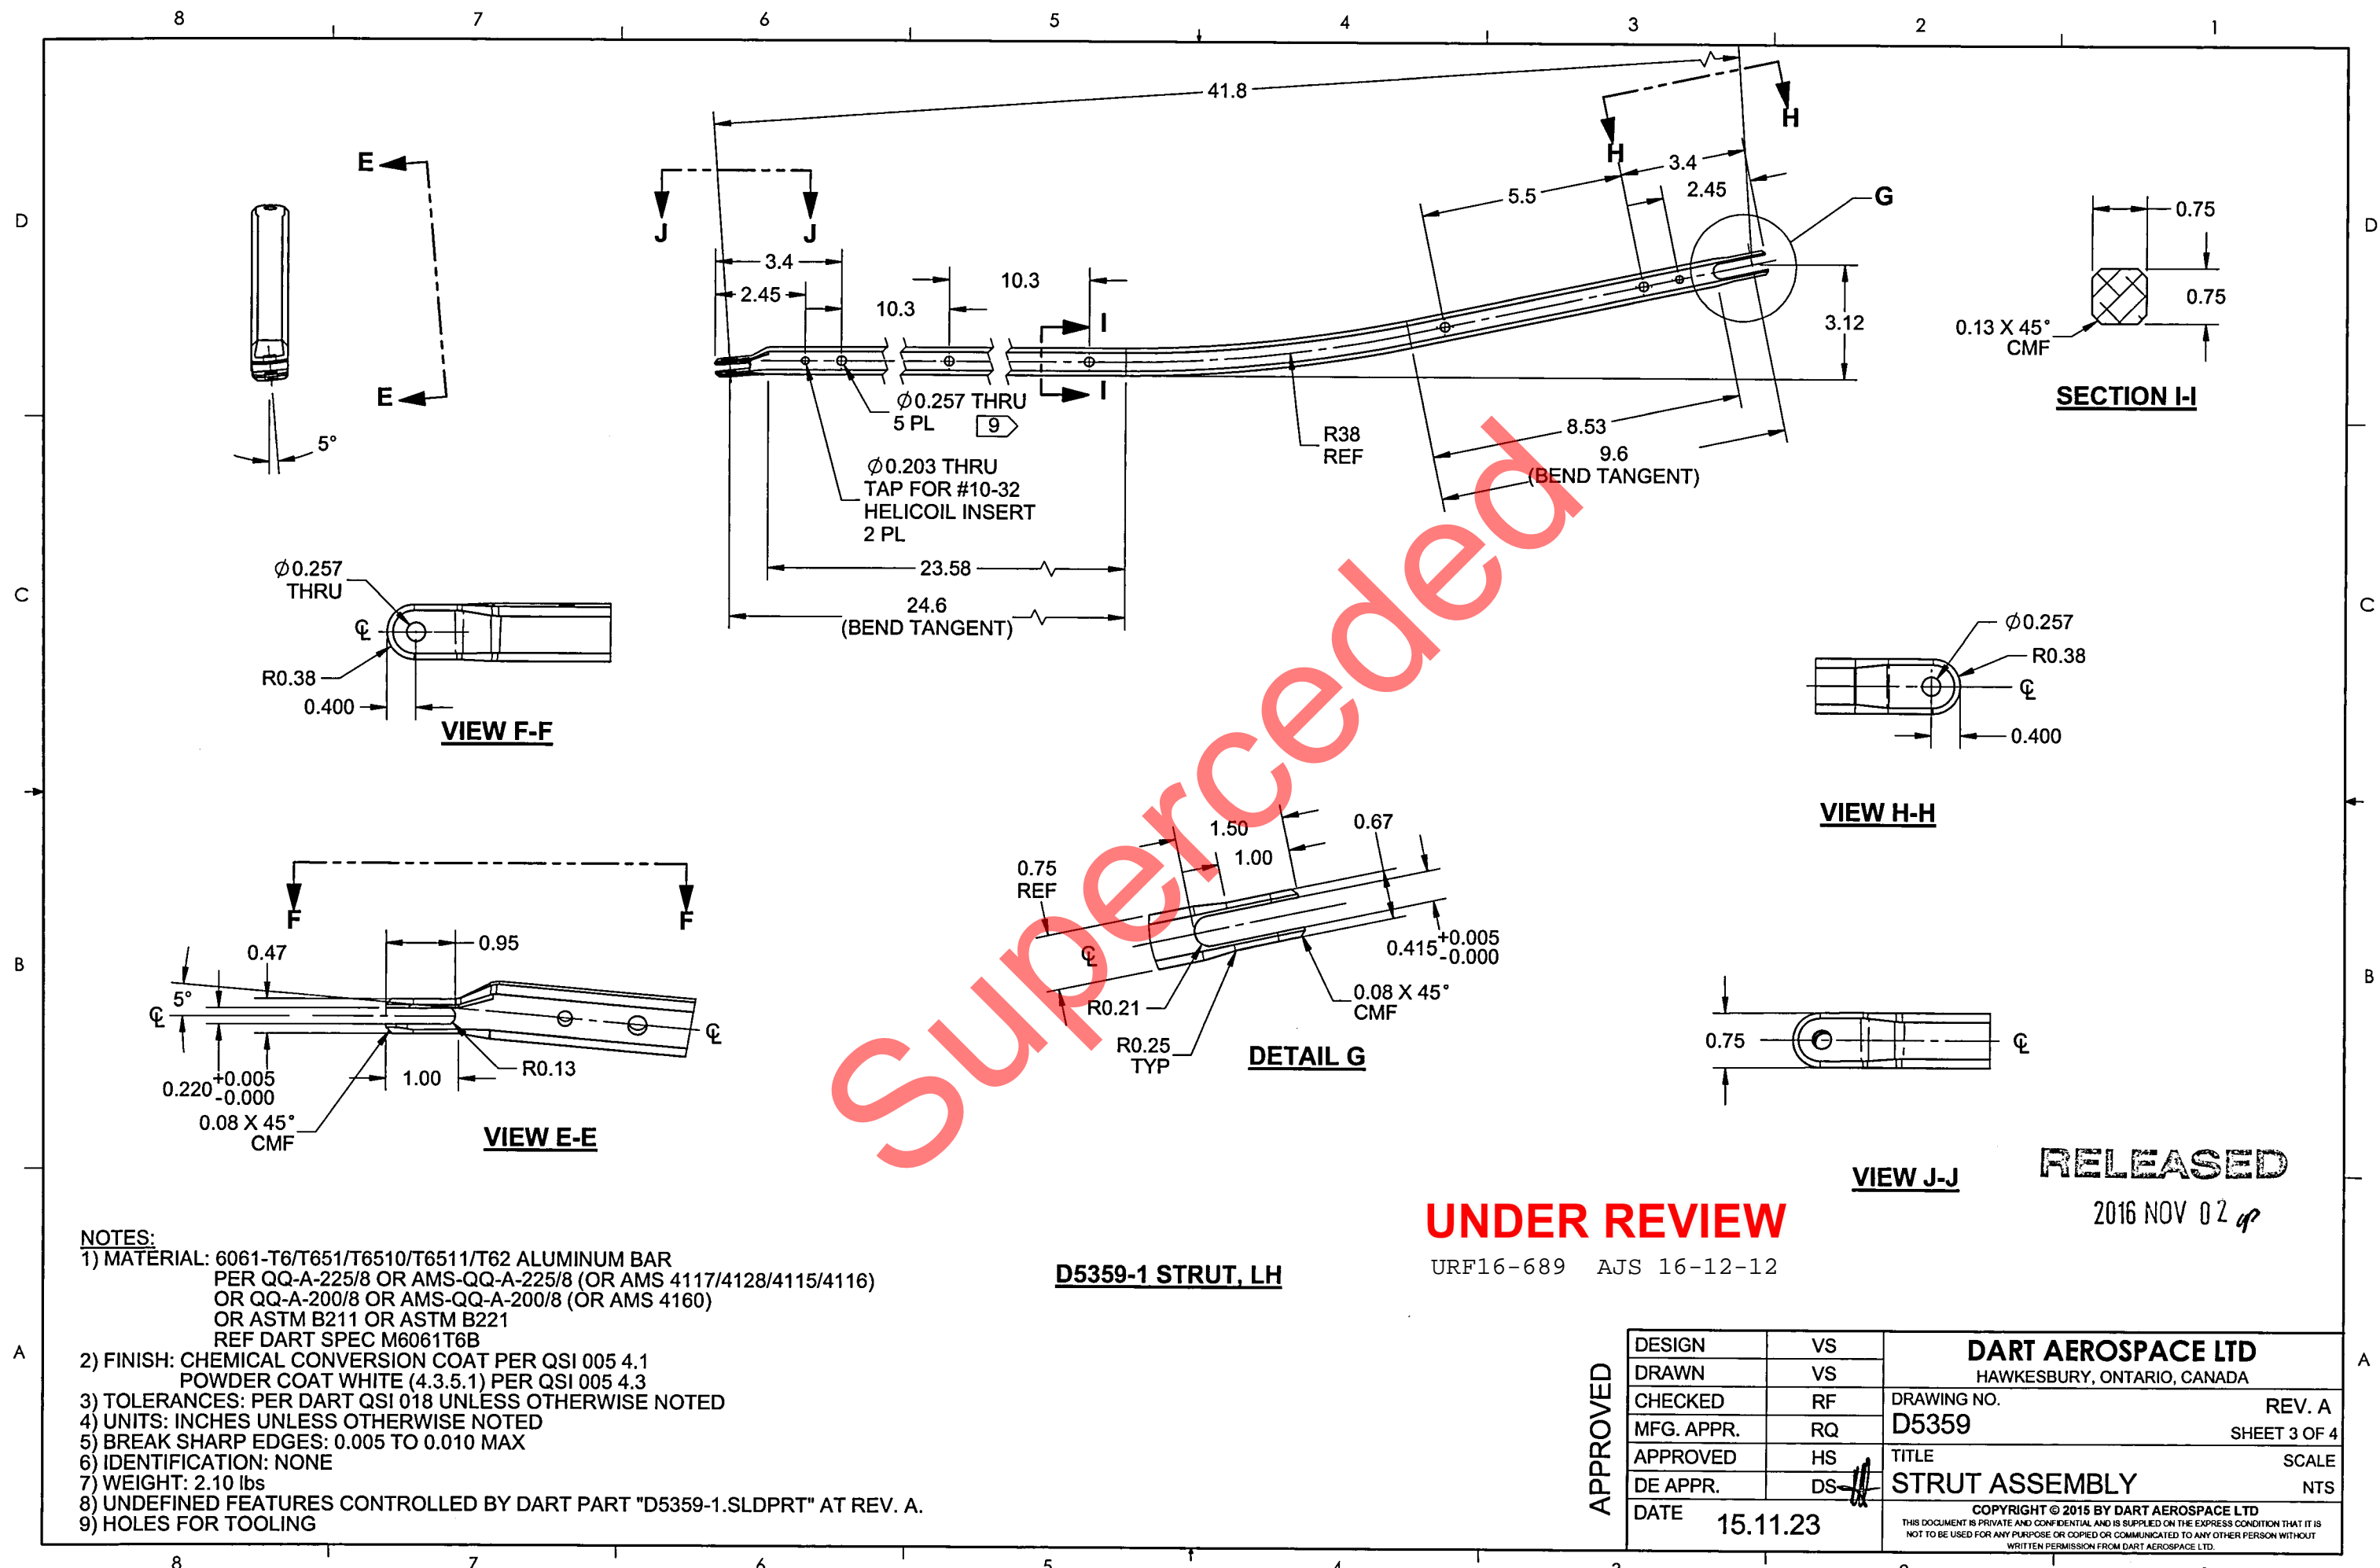

NOTES:

- 1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM BAR
PER QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
OR QQ-A-200/8 OR AMS-QQ-A-200/8 (OR AMS 4160)
OR ASTM B211 OR ASTM B221
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER QSI 005 4.1
POWDER COAT WHITE (4.3.5.1) PER QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: NONE
- 7) WEIGHT: 2.10 lbs
- 8) UNDEFINED FEATURES CONTROLLED BY DART PART "D5359-1.SLDPRT" AT REV. A.
- 9) HOLES FOR TOOLING

D5359-1 STRUT, LH

UNDER REVIEW









URF16-689 AJ5 16-12-12

RELEASED

2016 NOV 02

APPROVED

DESIGN	VS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	VS		
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	RQ	D5359	SHEET 3 OF 4
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	STRUT ASSEMBLY	NTS
DATE	15.11.23	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

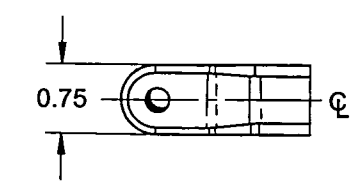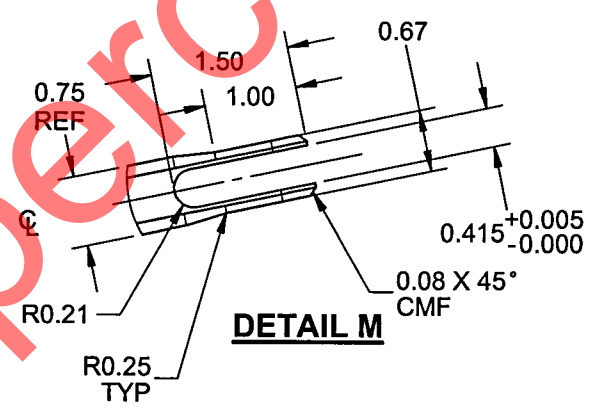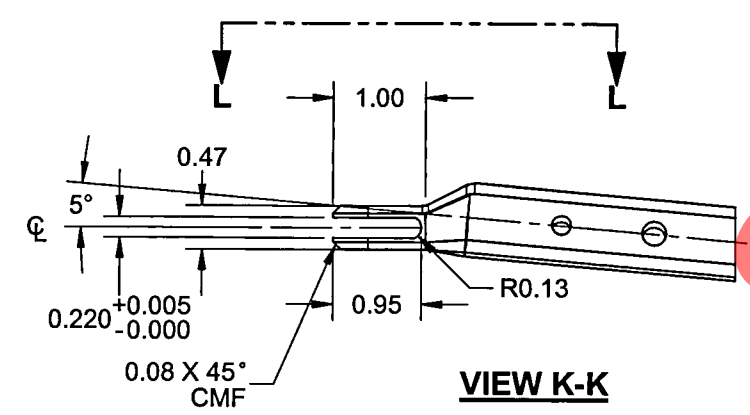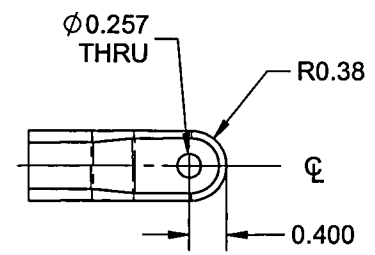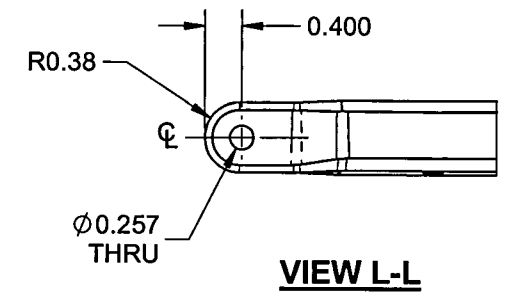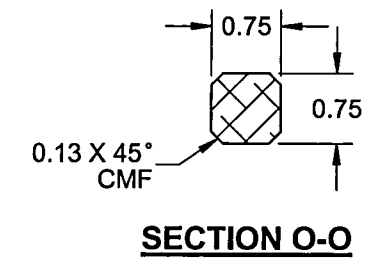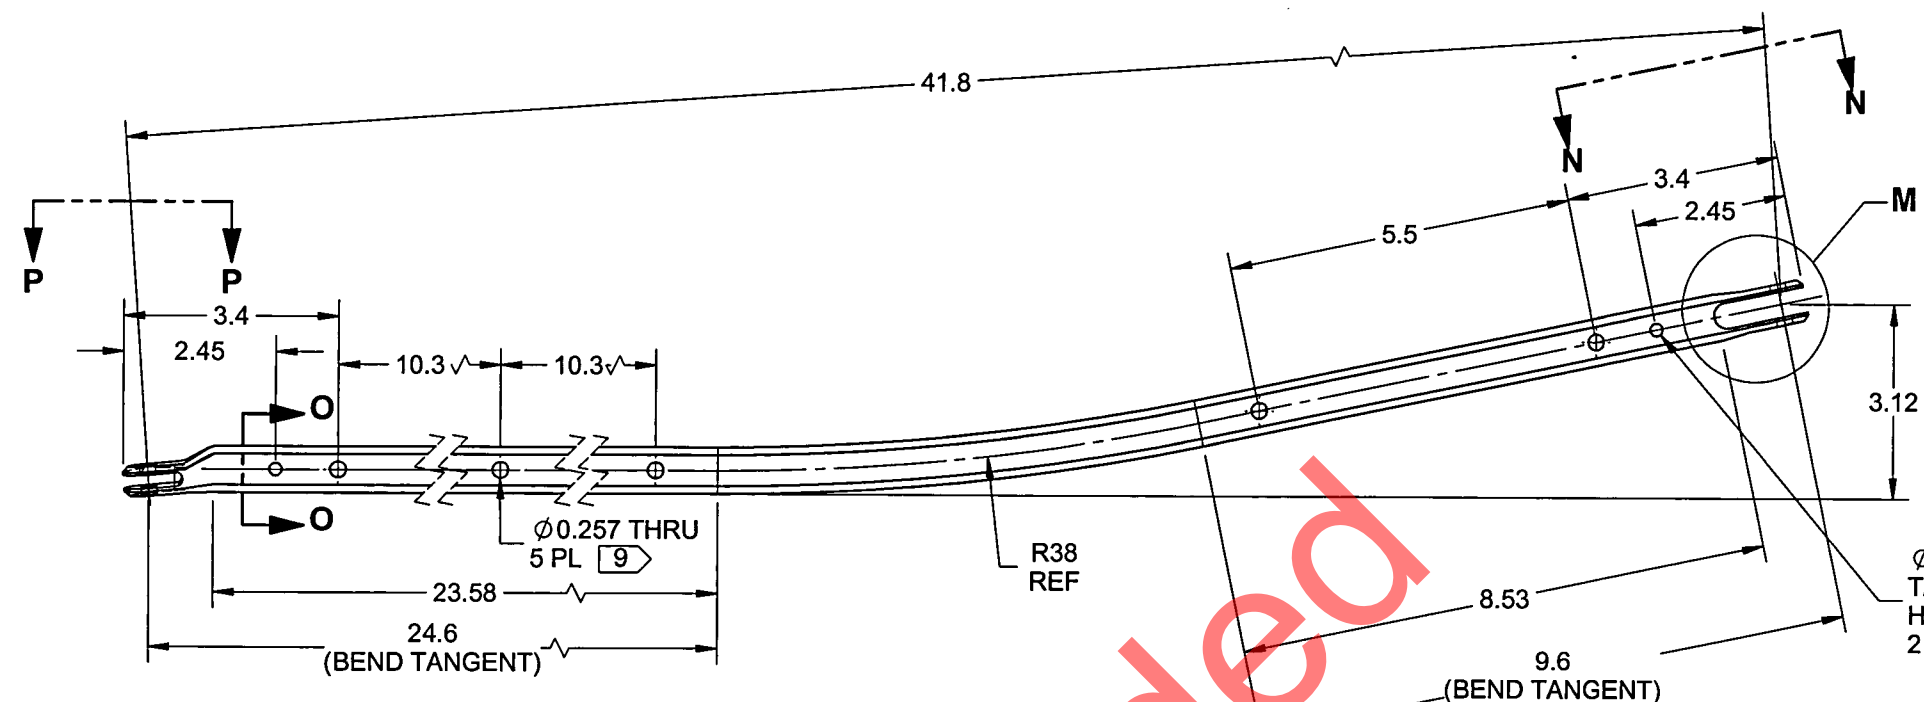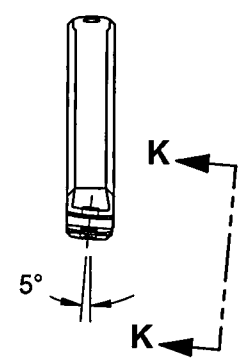

UNDER REVIEW
URF16-689 AJS 16-12-12

RELEASED
2016 NOV 02 *up*

- NOTES:**
- 1) MATERIAL: 6061-T6/T651/T6510/T6511/T62 ALUMINUM BAR
PER QQ-A-225/8 OR AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
OR QQ-A-200/8 OR AMS-QQ-A-200/8 (OR AMS 4160)
OR ASTM B211 OR ASTM B221
REF DART SPEC M6061T6B
 - 2) FINISH: CHEMICAL CONVERSION COAT PER QSI 005 4.1
POWDER COAT WHITE (4.3.5.1) PER QSI 005 4.3
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
 - 6) IDENTIFICATION: NONE
 - 7) WEIGHT: 2.10 lbs
 - 8) UNDEFINED FEATURES CONTROLLED BY DART PART "D5359-2.SLDPRT" AT REV. A.
 - 9) HOLES FOR TOOLING

D5359-2 STRUT, RH

APPROVED

DESIGN	VS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	VS		
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	RQ	D5359	SHEET 4 OF 4
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	STRUT ASSEMBLY	NTS
DATE	15.11.23	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	